
STAINLESS STEEL

- Enclosure construction 100% 14 ga stainless steel, type 304 #4 finish
- "in house" heavy-duty stainless steel locking system
- Industrial rated keyed camlock
- Has tabs on lid for additional padlock
- Offset louvers for crossventilation
- Dual gas struts to assure easy access to top mount design
- Stainless steel hinges with staked pin
- Stainless steel or 3/4" plywood mounting panel
- Universal sloped mounting tray, customized to fit all controllers
- Full door/lid gasket seal
- Steel fabricated Universal Mounting Base with stainless steel nuts, bolts, & washers
- Limited warranty, 15 years

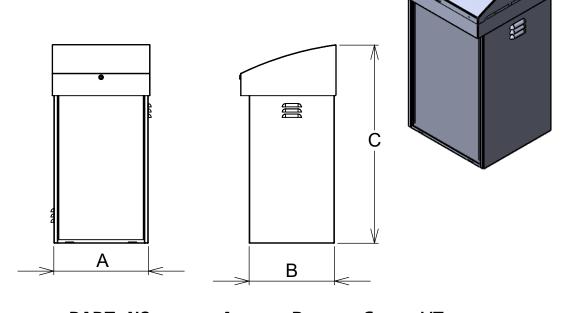

ASTO-SS-18 18" 16-1/4" 39" 126	PART NO.	A	<u> </u>	<u> </u>	<u>WT</u>
	ASTO-SS-18	18"	16-1/4"	39"	105 126 148

UNLESS OTHERWISE SPECIFIED:					_			
		NAME	DATE			ALLSPEC ENCLOSUR	RES, INC.	
ALL DIMENSIONS OUTSIDE DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL±.060 ANGULAR: BEND ± 1/2 DEGREE TWO PLACE DECIMAL ±.030 THREP PLACE DECIMAL ±.010 INSIDE RADII: .031 MAX BURR: .010	DRAWN	K. MILLER	4/1/2016			582 South Grand Avenue San Jacinto, Ca. 92582		
	CHECKED	ECKED		ALLSPEC		Ph: 951-654-5500		
	ENG APPR.			ENCLOSU	RES INC.	Fx: 951-654-5150		
	MFG APPR.			TITLE:	· - /	\sim		
	Q.A.			A.	SIC)-S		
	PROPRIETARY AND CONFIDENTIAL			, ,	•			
14 ga. (.078) STAINLESS STEEL	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ALL-SPEC ENCLOSURES, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF		DWG. NO.		0000	REV		
TYPE 304 #4			ASIC	STO-SS-0000				
DO NOT SCALE DRAWING	ALL-SPEC ENCLOSURES, INC. IS PROHIBITED.					SHEET 1	OF 1	
3		2			1			

5