


- 12 GA Stainless Steel type 304 non magnetic with #4 finish
- Stainless Steel hinge and pin (full length/staked)
- Vandal and weather resistant enclosure is a NEMA 3R rainproof as listed by Underwriter's Laboratories, INC
- Safeguard - 3 point locking system
- Pry resistant 1" raised "flush fit door"
- Vented roof with protective fine mesh screen between raised roof and enclosure to allow for air circulation and filtration
- Neoprene weather stripping (full door)
- 3/4" plywood backboard (marine grade ACX) mounted with 4 stainless steel bolts and painted to spec*
- Document tray inside door
- Galvanized steel fabricated "universal mounting base" with zinc plated hardware
- Limited warranty - 15 years

NOTE: The vented roof is raised 1" above the enclosure body and overlaps each of the 4 sides of the enclosure by 1 1/2" which promotes good air circulation. The vented roof has 4 stainless steel bolts welded to the underside, which inserts through the screen frame into the holes in the enclosure where they are bolted into place. This allows for servicing and replacement of the screen if necessary

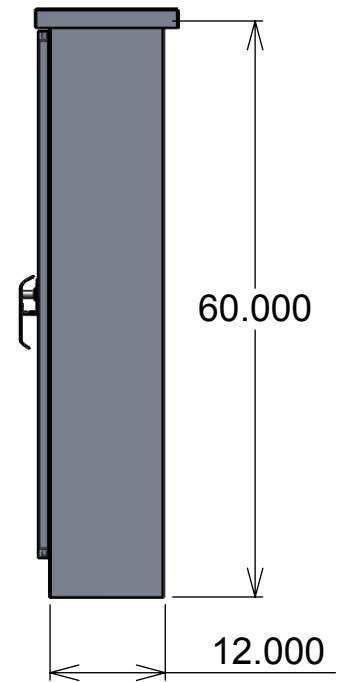

* The backboard of this enclosure is painted to Cal-Trans specification:
2 coats of primer and 2 coats of white enamel painted over entire backboard even edges

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF **ALL-SPEC ENCLOSURES, INC.** ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF **ALL-SPEC ENCLOSURES, INC.** IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
ALL DIMENSIONS OUTSIDE DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± .060 ANGULAR: BEND ± 1/2 DEGREE TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .010 INSIDE RADII: .031 MAX BURR: .010		DRAWN	K. MILLER 4/21/2017
MATERIAL	CHECKED		
FINISH	ENG APPR.		
	MFG APPR.		
	Q.A.		
COMMENTS:			
DO NOT SCALE DRAWING			



ALLSPEC ENCLOSURES, INC.
582 South Grand Avenue
San Jacinto, Ca. 92582
Ph: 951-654-5500
Fx: 951-654-5150

TITLE: ASCT-D-SS SPEC SHEET	
DWG. NO. ASCT-D-SS-0000	REV
SHEET 1 OF 1	